


CORECLAD[®] Series Door Lead Lined Wood Door



268 OLD LINDALE RD. ▲ ROME, GA 30161
706-235-8822 ▲ FAX 706-232-2518

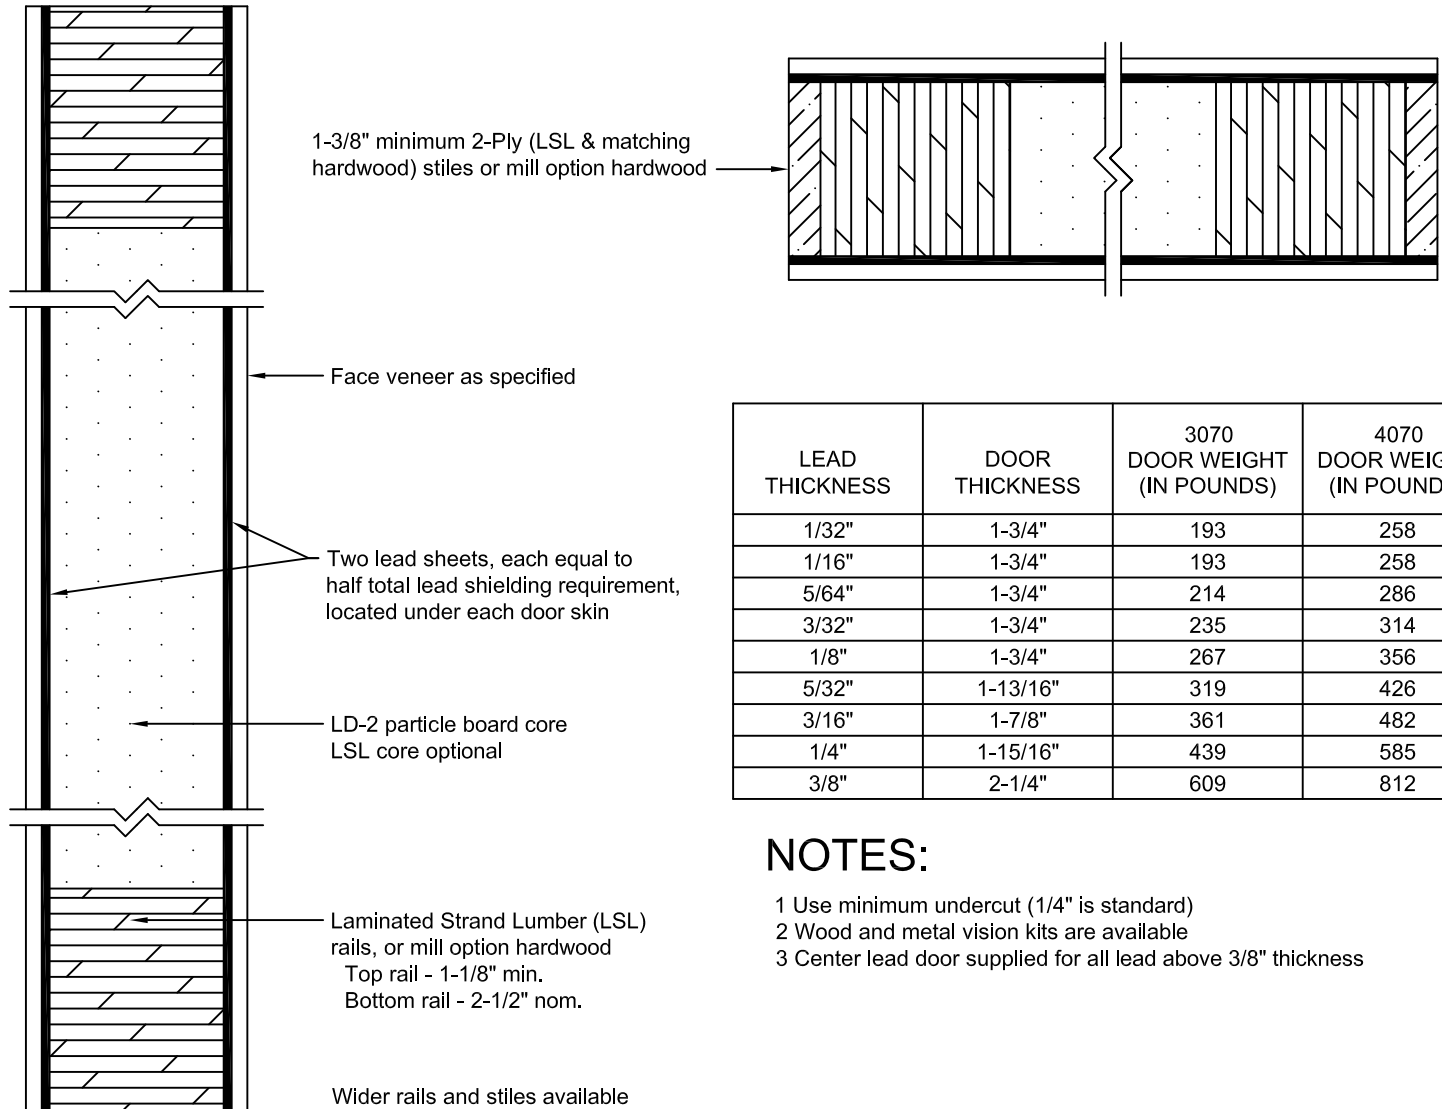

| LEAD THICKNESS | DOOR THICKNESS | 3070 DOOR WEIGHT (IN POUNDS) | 4070 DOOR WEIGHT (IN POUNDS) |
|----------------|----------------|------------------------------|------------------------------|
| 1/32" | 1-3/4" | 193 | 258 |
| 1/16" | 1-3/4" | 193 | 258 |
| 5/64" | 1-3/4" | 214 | 286 |
| 3/32" | 1-3/4" | 235 | 314 |
| 1/8" | 1-3/4" | 267 | 356 |
| 5/32" | 1-13/16" | 319 | 426 |
| 3/16" | 1-7/8" | 361 | 482 |
| 1/4" | 1-15/16" | 439 | 585 |
| 3/8" | 2-1/4" | 609 | 812 |

NOTES:

- 1 Use minimum undercut (1/4" is standard)
- 2 Wood and metal vision kits are available
- 3 Center lead door supplied for all lead above 3/8" thickness

Door types available:

1. Non-Rated
2. 20-minute Neutral pressure
3. 20-minute positive pressure Cat. "A" with concealed intumescent
4. 20-minute positive pressure Cat. "B" with frame mount intumescent

NOTE: Frame mounted listed and approved, smoke gasket required for positive pressure doors for "S" (smoke) label